


Konftel 300IP and babyTEL

What you need

- A babyTEL SIP account
- A Konftel 300IP (software version 2.2.4 or higher) with internet connection

Installation

Login to your Konftel 300IP as ADMIN and enter the following settings in the Settings > SIP-tab. In red is the terminology that babyTEL uses.

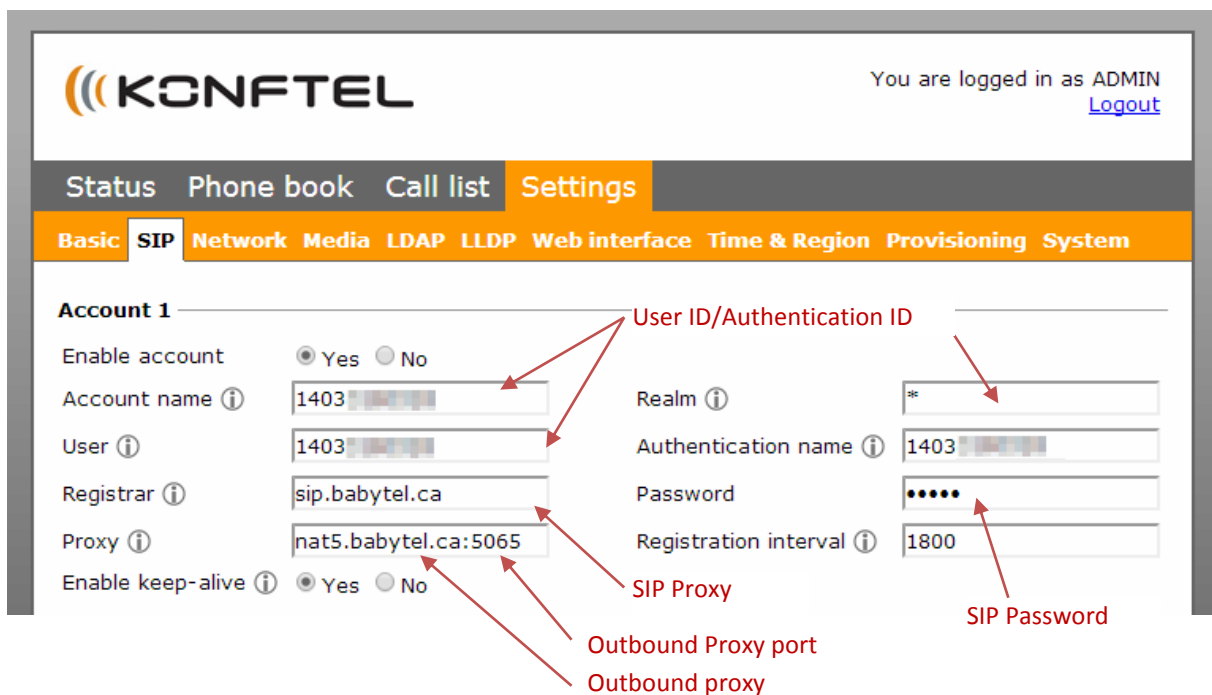

The screenshot shows the Konftel 300IP web interface. The user is logged in as ADMIN. The 'Settings' tab is selected, and the 'SIP' sub-tab is active. The 'Account 1' settings are displayed. Red arrows indicate the mapping between babyTEL terminology and the interface fields:

Field	Value	BabyTEL Terminology
Enable account	<input checked="" type="radio"/> Yes <input type="radio"/> No	
Account name	1403	User ID/Authentication ID
User	1403	User ID/Authentication ID
Registrar	sip.babytel.ca	SIP Proxy
Proxy	nat5.babytel.ca:5065	Outbound Proxy port, Outbound proxy
Enable keep-alive	<input checked="" type="radio"/> Yes <input type="radio"/> No	
Realm	*	User ID/Authentication ID
Authentication name	1403	User ID/Authentication ID
Password	*****	SIP Password
Registration interval	1800	