


## Konftel 300IP and babyTEL

### What you need

- A babyTEL SIP account
- A Konftel 300IP (software version 2.2.4 or higher) with internet connection

### Installation

Login to your Konftel 300IP as ADMIN and enter the following settings in the Settings > SIP-tab. In red is the terminology that babyTEL uses.

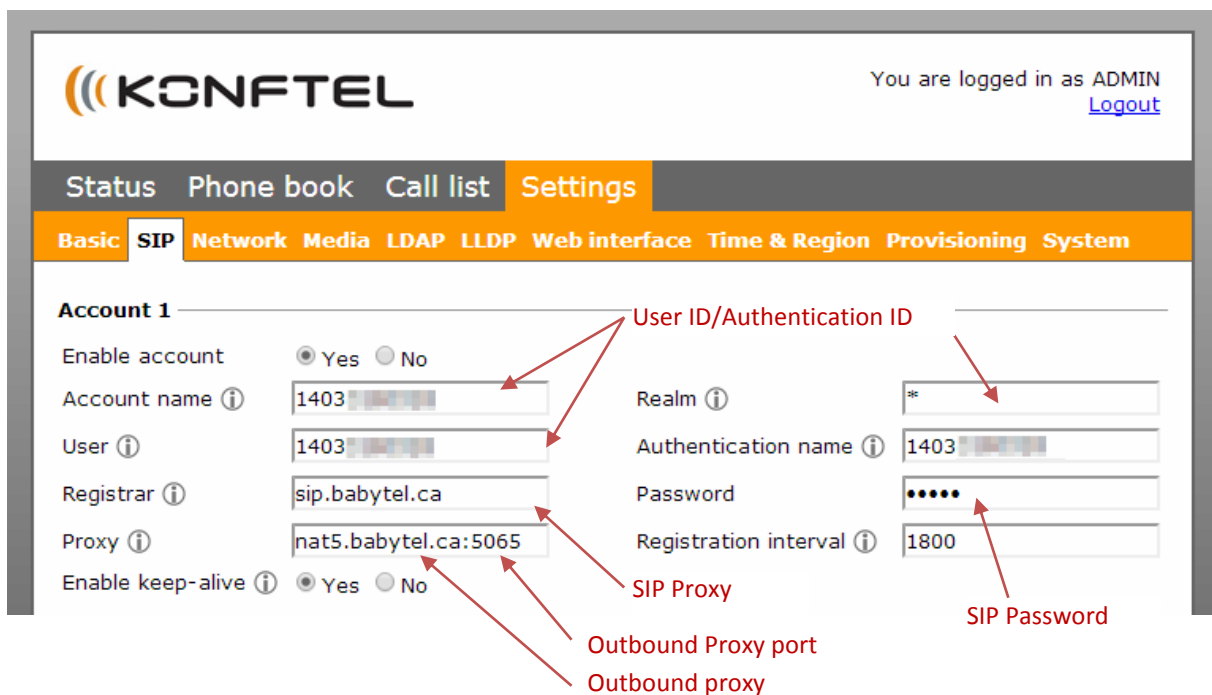

**KONFTEL** You are logged in as ADMIN [Logout](#)

Status Phone book Call list **Settings**

Basic **SIP** Network Media LDAP LLDP Web interface Time & Region Provisioning System

**Account 1**

Enable account	<input checked="" type="radio"/> Yes <input type="radio"/> No		
Account name ⓘ	1403	Realm ⓘ	*
User ⓘ	1403	Authentication name ⓘ	1403
Registrar ⓘ	sip.babytel.ca	Password	•••••
Proxy ⓘ	nat5.babytel.ca:5065	Registration interval ⓘ	1800
Enable keep-alive ⓘ	<input checked="" type="radio"/> Yes <input type="radio"/> No		

Red arrows point from labels to fields:

- User ID/Authentication ID (points to Account name, User, Authentication name)
- SIP Proxy (points to Registrar)
- Outbound Proxy port (points to port in Proxy)
- Outbound proxy (points to domain in Proxy)
- SIP Password (points to Password)