

Konftel 300IP and Unotelefoni

What you need

- An Unotelefoni account
- A Konftel 300IP (software version 2.2.7 or higher) with internet connection

Installation

Login to your Konftel 300IP web interface and go to **Settings > SIP**

In the "User" field you should type the **User** from Unotelefoni.


In the "Registrar" field type the **Domain** from Unotelefoni

In the "Proxy" field type the **Proxy** from Unotelefoni (eg. mju.k.unotelefoni.se)

In the "Authentication name" field type the **User** from Unotelefoni

In the "Password" field type the **Password** from Unotelefoni.

See picture below for an example.

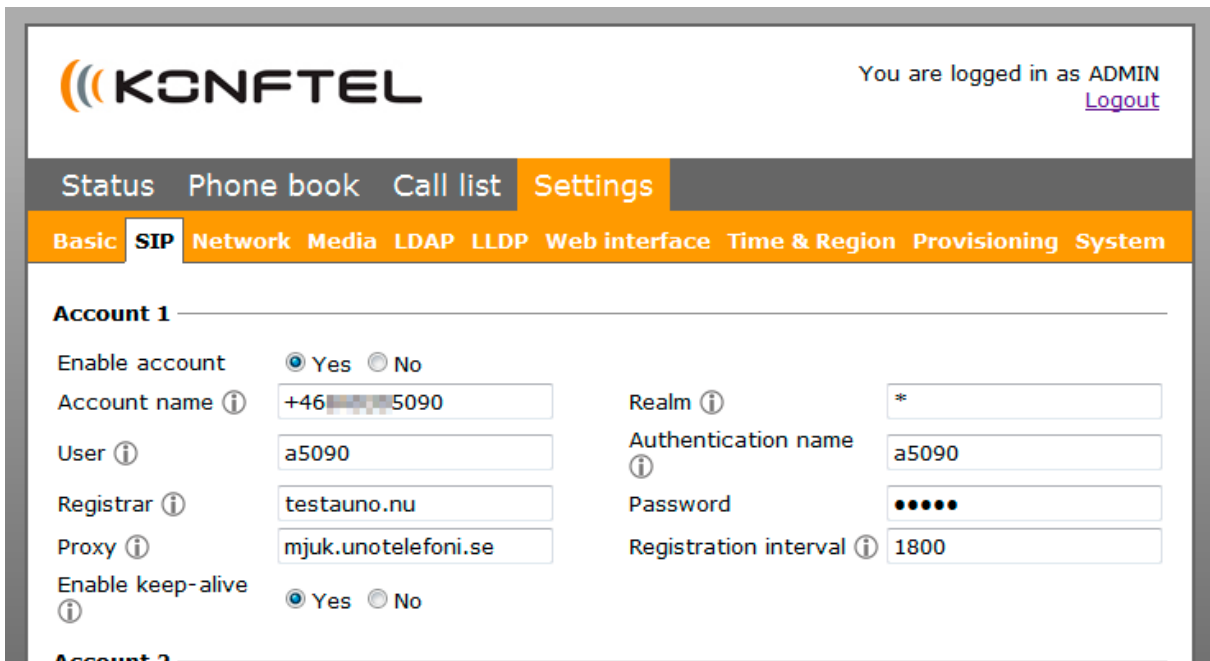

The screenshot shows the Konftel 300IP web interface. At the top left is the Konftel logo. At the top right, it says "You are logged in as ADMIN" with a "Logout" link. Below the header is a navigation bar with tabs: Status, Phone book, Call list, Settings (selected), Basic, SIP (selected), Network, Media, LDAP, LLDP, Web interface, Time & Region, Provisioning, System. The main content area is titled "Account 1" and contains the following configuration fields:

Enable account	<input checked="" type="radio"/> Yes <input type="radio"/> No	Realm	<input type="text" value="*"/>
Account name	<input type="text" value="+46[REDACTED]5090"/>	Authentication name	<input type="text" value="a5090"/>
User	<input type="text" value="a5090"/>	Password	<input type="password" value="•••••"/>
Registrar	<input type="text" value="testauno.nu"/>	Registration interval	<input type="text" value="1800"/>
Proxy	<input type="text" value="mjuk.unotelefoni.se"/>		
Enable keep-alive	<input checked="" type="radio"/> Yes <input type="radio"/> No		