


Add SIP extension on a 3CX Phone System and register a Konftel 300IP

Step 1

Login to the “3CX Phone System Management”

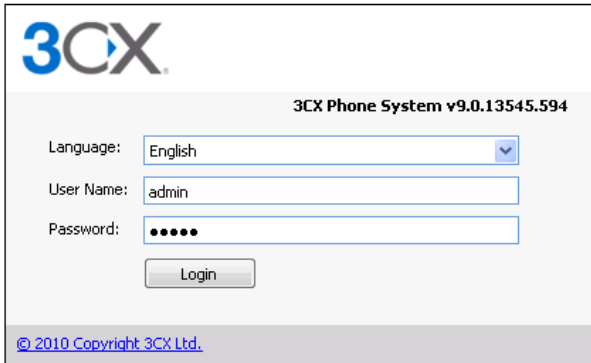

3CX
3CX Phone System v9.0.13545.594

Language: English

User Name: admin


Password: ●●●●

Login

© 2010 Copyright 3CX Ltd.

Step 2

Click on “Add extension” to create a new SIP account

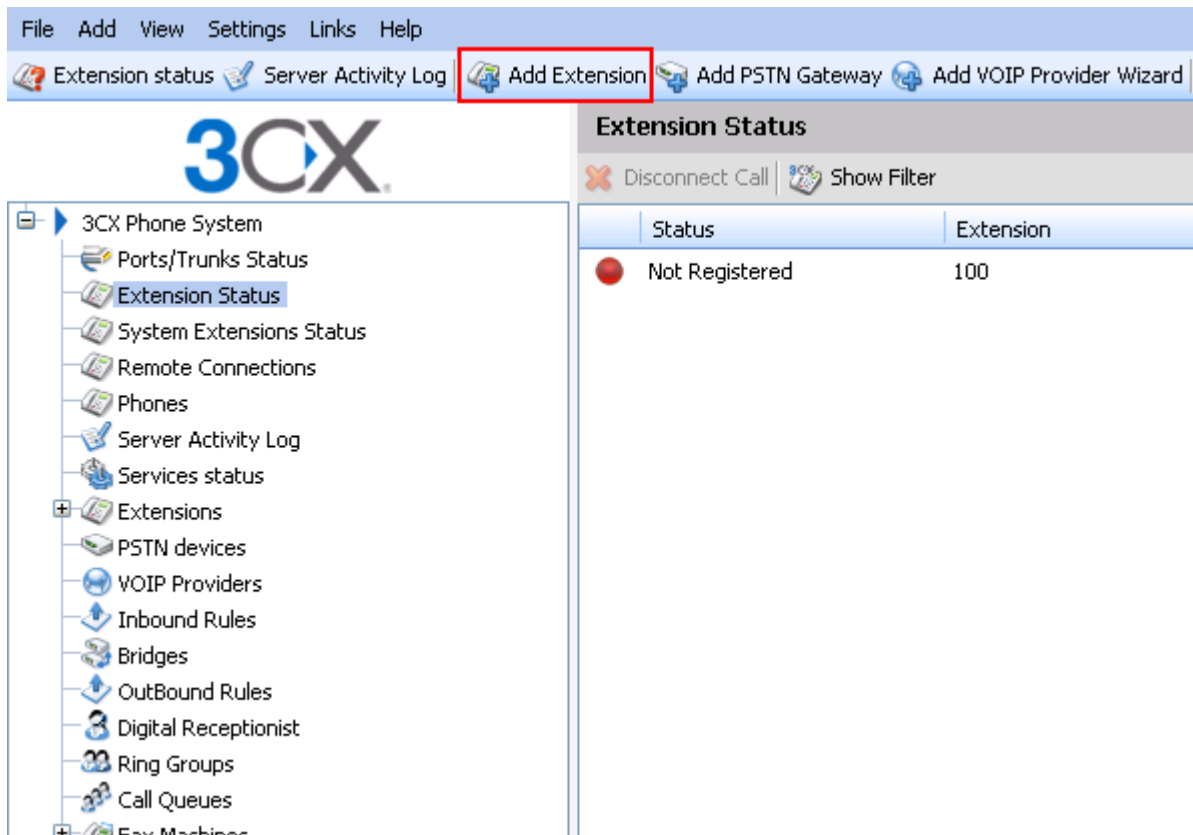

File Add View Settings Links Help

Extension status Server Activity Log **Add Extension** Add PSTN Gateway Add VOIP Provider Wizard

3CX

3CX Phone System

- Ports/Trunks Status
- Extension Status
- System Extensions Status
- Remote Connections
- Phones
- Server Activity Log
- Services status
- Extensions
- PSTN devices
- VOIP Providers
- Inbound Rules
- Bridges
- OutBound Rules
- Digital Receptionist
- Ring Groups
- Call Queues
- Fax Machines

Extension Status


Disconnect Call Show Filter

Status	Extension
Not Registered	100

Step 3

Enter the extension that you want to create for the Konftel 300IP






Extensions

 Edit Extension settings and click OK or Apply to save changes.

General
Forwarding Rules
Phone Provisioning
3CXPhone/Assistant Provisioning
Other
Office Hours



User Information

Specify extension number, name, and email address for voicemail notifications and fax delivery.

Extension Number	200	
First Name	John	
Last Name	Doe	
Email address	john.doe@company.com	
Mobile Number	555-22342234	


Authentication

The authentication ID and Password are used by the phone to authenticate with 3CX Phone System and match the ID and Password set on the SIP phone. If the phone has a user id field enter the extension number.

ID	200	
Password	*****	 ***

Step 4

Enter the account information in the Konftel 300IPs web interface under “Settings > SIP”.


You are logged in as ADMIN [Logout](#)

Status
Phone book
Call list
Settings

Basic
SIP
Network
Media
Web interface
Time & Region
Provisioning
System

Account 1

Enable account	<input checked="" type="radio"/> Yes <input type="radio"/> No		
Account name ⓘ	200	Realm ⓘ	*
User ⓘ	200	Authentication name ⓘ	200
Registrar ⓘ	192.168.0.1	Password	*****
Proxy ⓘ		Registration interval ⓘ	1800