


Konftel 300IP and Skype

What you need

- A Skype manager account (<http://manager.skype.com>)
- A Konftel 300IP connected to a internet connection

Step 1

Login to your Skype manager account and create a Skype connect profile. Follow the guide:

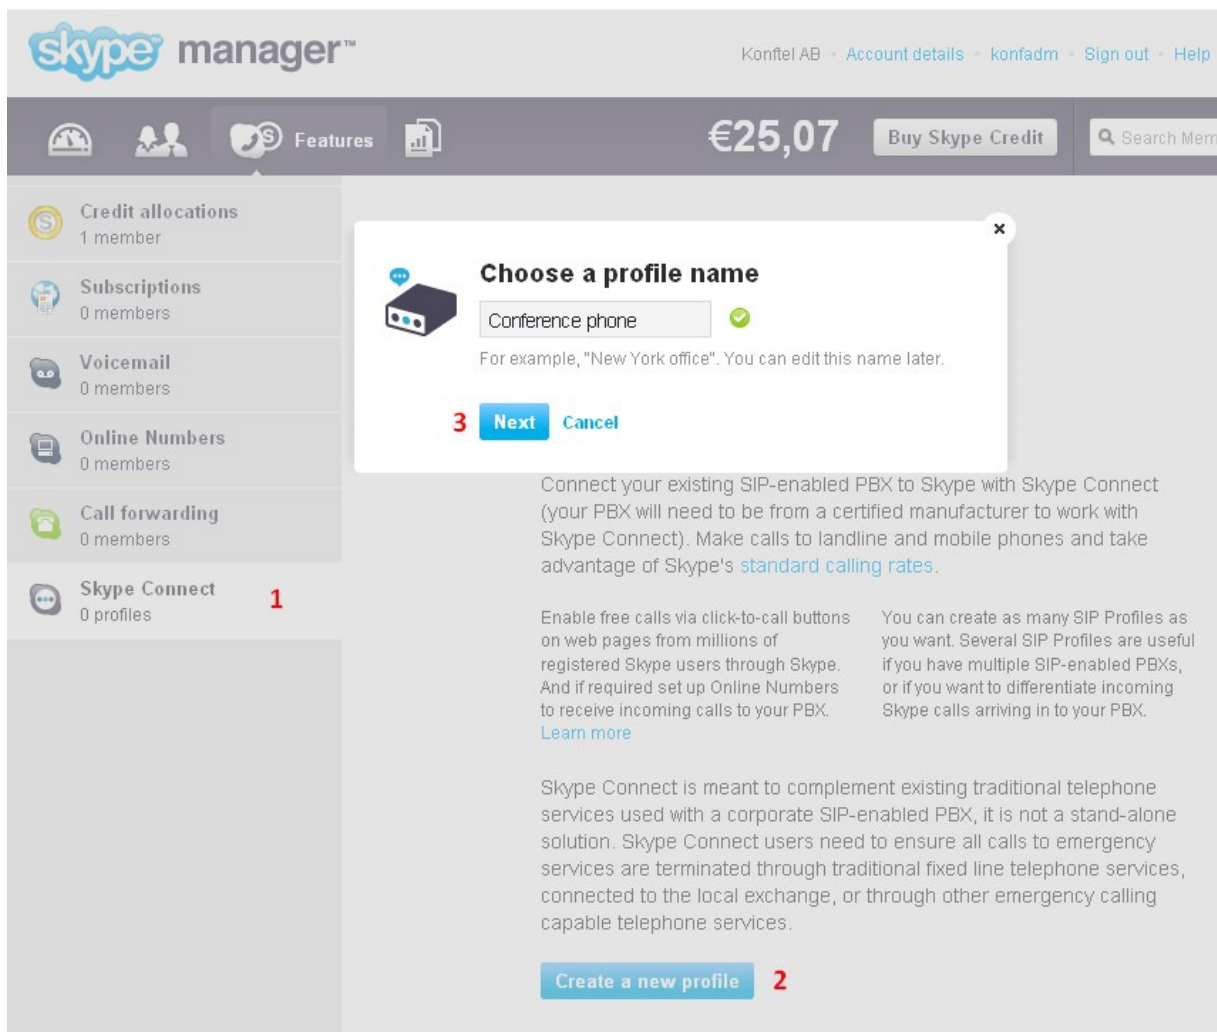

The screenshot shows the Skype Manager interface. At the top, the 'skype manager™' logo is on the left, and 'Konftel AB · Account details · konfadm · Sign out · Help' is on the right. Below the logo, there are icons for various features and a balance of '€25,07'. A 'Buy Skype Credit' button and a search bar are also visible.

The main content area is divided into a left sidebar and a main panel. The sidebar lists several features: 'Credit allocations' (1 member), 'Subscriptions' (0 members), 'Voicemail' (0 members), 'Online Numbers' (0 members), 'Call forwarding' (0 members), and 'Skype Connect' (0 profiles) with a red '1' next to it.

The main panel displays a dialog box titled 'Choose a profile name'. It features a conference phone icon, a text input field containing 'Conference phone' with a green checkmark, and a note: 'For example, "New York office". You can edit this name later.' Below the input field are two buttons: 'Next' (with a red '3' next to it) and 'Cancel'.

Below the dialog box, there is a section titled 'Skype Connect' with the following text:

Connect your existing SIP-enabled PBX to Skype with Skype Connect (your PBX will need to be from a certified manufacturer to work with Skype Connect). Make calls to landline and mobile phones and take advantage of Skype's [standard calling rates](#).

Enable free calls via click-to-call buttons on web pages from millions of registered Skype users through Skype. And if required set up Online Numbers to receive incoming calls to your PBX. [Learn more](#)

You can create as many SIP Profiles as you want. Several SIP Profiles are useful if you have multiple SIP-enabled PBXs, or if you want to differentiate incoming Skype calls arriving in to your PBX.

Skype Connect is meant to complement existing traditional telephone services used with a corporate SIP-enabled PBX, it is not a stand-alone solution. Skype Connect users need to ensure all calls to emergency services are terminated through traditional fixed line telephone services, connected to the local exchange, or through other emergency calling capable telephone services.

At the bottom of this section is a blue button labeled 'Create a new profile' with a red '2' next to it.

Step 2

When the profile is created you'll receive a username, password and Skype connect address.

The screenshot shows the 'skype manager™' interface. At the top right, it says 'Konftel AB - Account details - konfadm - Sign out - Help'. Below this is a navigation bar with icons for home, users, features, and a balance of €25,07. A 'Buy Skype Credit' button and a search bar are also present. The left sidebar contains links for 'Conference phone', 'Profile settings', 'Authentication details', and 'Reports'. The main content area is titled 'Authentication details' and includes a PBX icon. It prompts the user to 'Please choose the method of authentication needed for your PBX.' Two options are shown: 'Registration (Username/password)' and 'or, IP Authentication'. Below this, a table lists the generated credentials: SIP User (99051000-3), Password (bV-...wXJ with a 'Generate a new password' link), Skype Connect address (sip.skype.com), and UDP Port (5060). A warning message states 'SIP user is not yet registered at sip.skype.com'. The 'Next steps' section includes 'Configure your PBX with authentication details above.' and 'Buy a channel subscription to activate SIP Profile.'

skype manager™

Konftel AB - Account details - konfadm - Sign out - Help

€25,07 Buy Skype Credit Search Me

Conference phone

Profile settings

Authentication details

Reports

« Back to SIP Profile list

Authentication details

Please choose the method of authentication needed for your PBX.

Registration (Username/password) or, IP Authentication

SIP User	99051000-3
Password	bV-...wXJ Generate a new password
Skype Connect address	sip.skype.com
UDP Port	5060

⚠ SIP user is not yet registered at sip.skype.com


Next steps

Configure your PBX with authentication details above.

Buy a channel subscription to activate SIP Profile.

Step 3

Enter that information in the Konftel 300IP web interface under the “Settings” > “SIP” tab

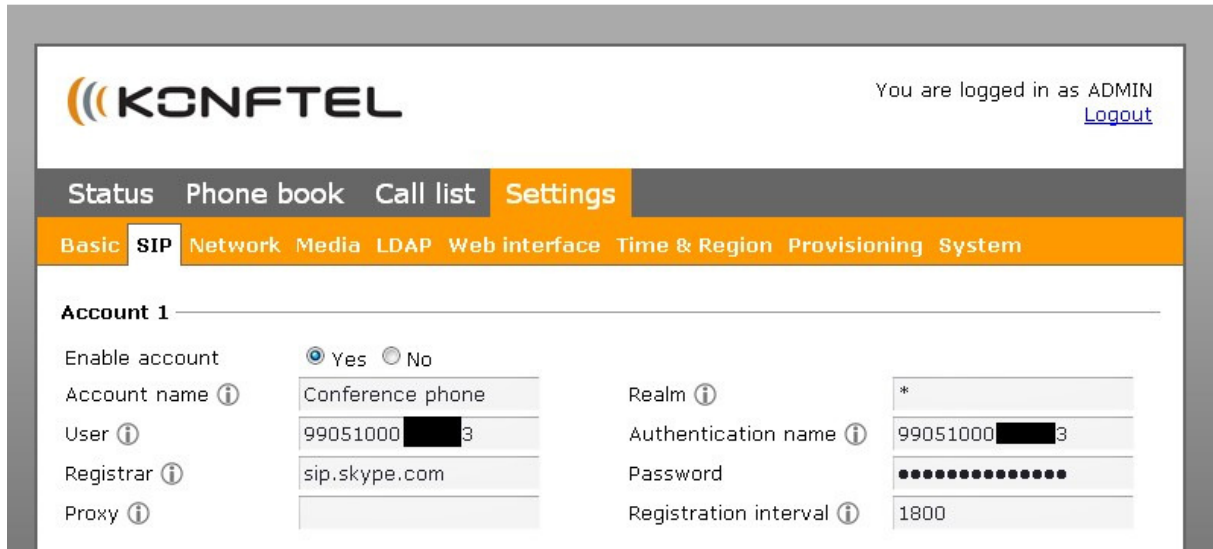

The screenshot shows the Konftel 300IP web interface. At the top, the Konftel logo is on the left, and the user is logged in as ADMIN with a Logout link on the right. Below the header is a navigation menu with tabs for Status, Phone book, Call list, Settings, and System. The Settings tab is active, and within it, the SIP sub-tab is selected. The main content area is titled 'Account 1' and contains the following settings:

Enable account	<input checked="" type="radio"/> Yes <input type="radio"/> No	Realm	*
Account name	Conference phone	Authentication name	99051000 [redacted] 3
User	99051000 [redacted] 3	Password	••••••••••
Registrar	sip.skype.com	Registration interval	1800
Proxy			

Save the settings in the web interface. The phone should now be registered to the Skype server.

You must also change the DTMF settings under “Media” to “Inband”. Also check that you have the latest version under “Provisioning”.

Step 4

To be able to call you must add at least one (1) “Channel subscription” and add credit to the profile. The Konftel 300IP can handle up to 4 channels at the same time.

You should now be able to call with the Konftel 300IP. Make sure that you enter the country code if you want to dial a number (eg. 46 for Sweden). **It’s not possible to call directly to a Skype contact that doesn’t have a public number.**