

Konftel 300IP and Dialect Unified


What you need

- A Dialect Unified account
- A Konftel 300IP (software version 2.0.5 or higher) with internet connection

Installation

Login to your Konftel 300IP and enter the account settings that you have. **Make sure that you enter the proxy settings as outbound proxy and that you end the address with ;lr;hide**

Eg. if got a proxy address (from Dialect) that is proxy.a.b.net, enter this in the **outbound proxy** as **proxy.a.b.net;lr;hide**

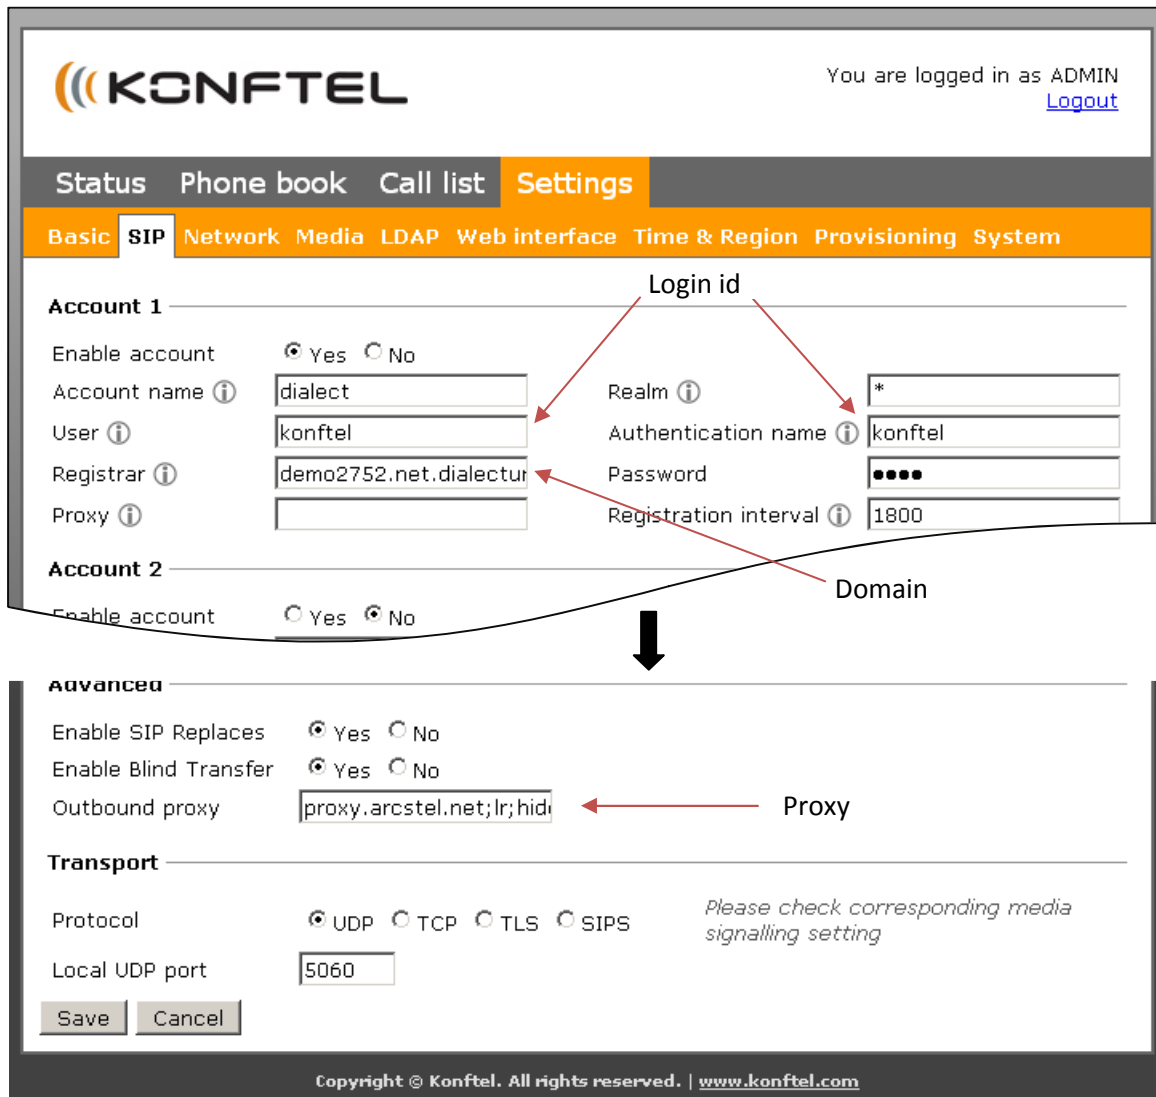

KONFTEL You are logged in as ADMIN [Logout](#)

Status Phone book Call list **Settings**

Basic **SIP** Network Media LDAP Web interface Time & Region Provisioning System

Account 1

Enable account Yes No

Account name ⓘ dialect

User ⓘ konftel

Registrar ⓘ demo2752.net.dialectur

Proxy ⓘ

Login id

Realm ⓘ *

Authentication name ⓘ konftel

Password

Registration interval ⓘ 1800

Account 2

Enable account Yes No

Domain

Advanced

Enable SIP Replaces Yes No

Enable Blind Transfer Yes No

Outbound proxy proxy.arcstel.net;lr;hide Proxy

Transport

Protocol UDP TCP TLS SIPS *Please check corresponding media signalling setting*

Local UDP port 5060

Save Cancel

Copyright © Konftel. All rights reserved. | www.konftel.com